
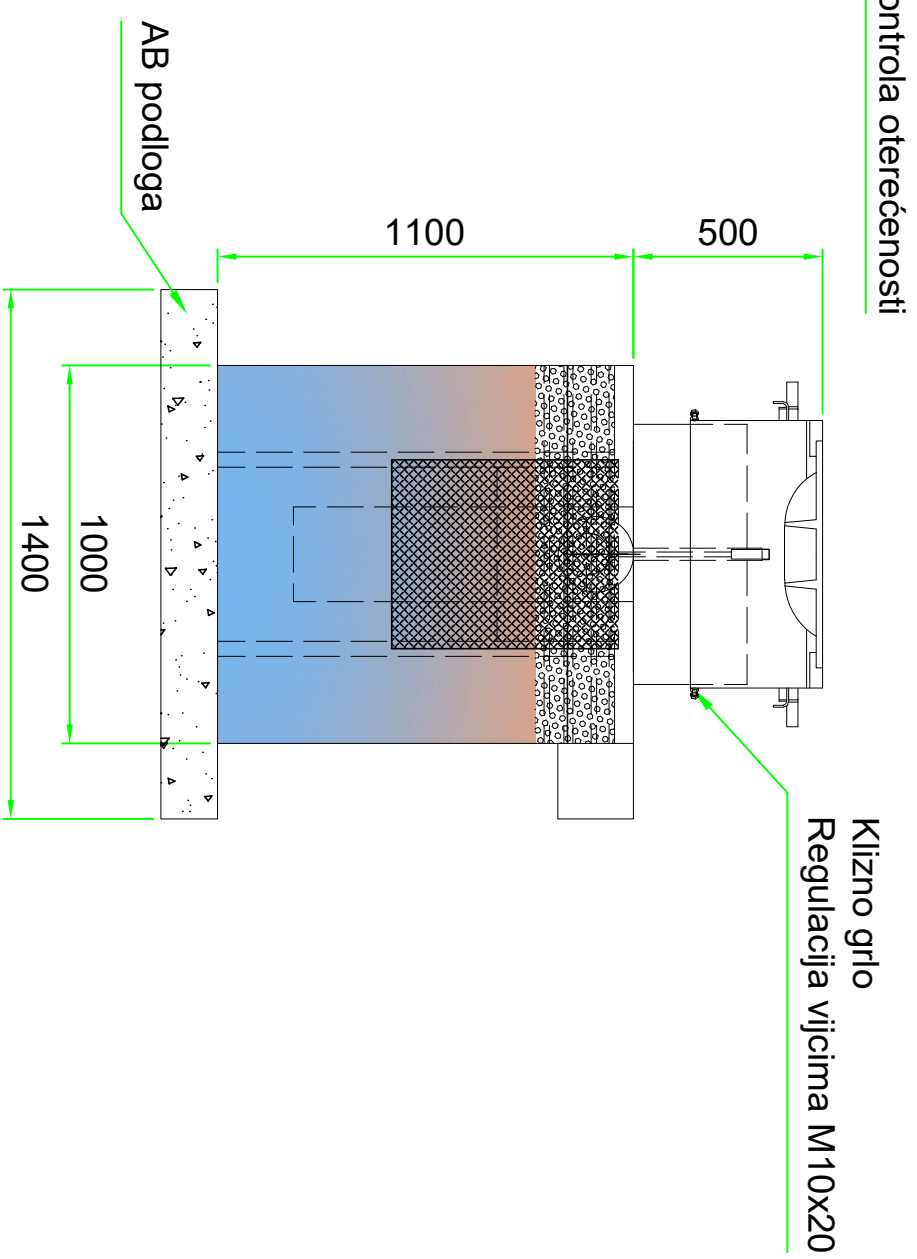


Separator 2000l bypass

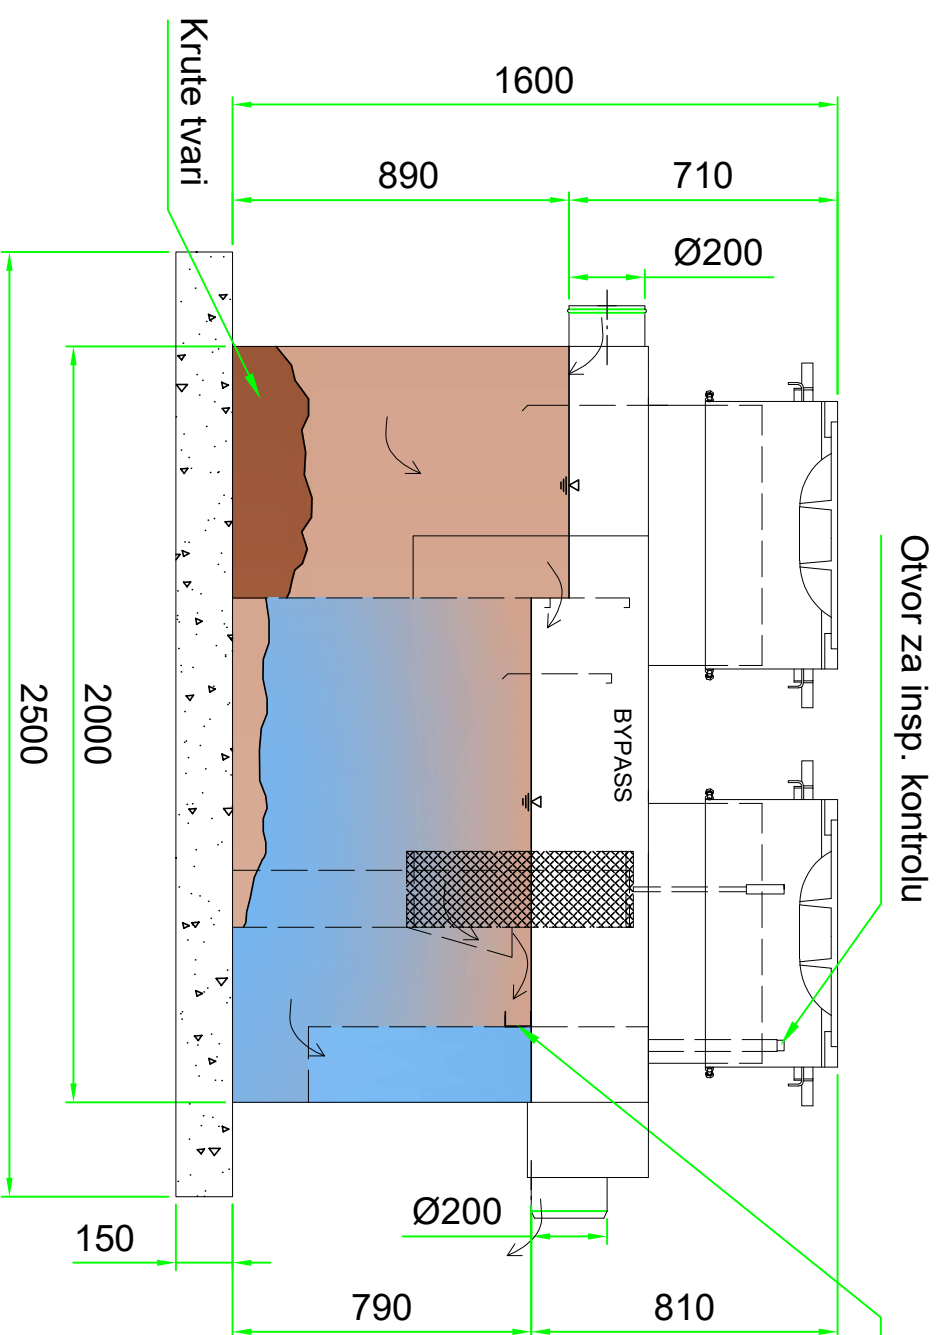

Volumen separatora: 2000 l


Protok separatora: 3+12 l/s

Ciljevi: Ø200

Teleskopska klizna grla

Lijevano željezni poklopci nosivosti 125 kN, 250 kN ili 400 kN

Separatori spadaju u I. klasu separatora prema hrvatskoj normi HRN EN 858 što znači da je količina rezidualnog ulja manja od 5 mg/l

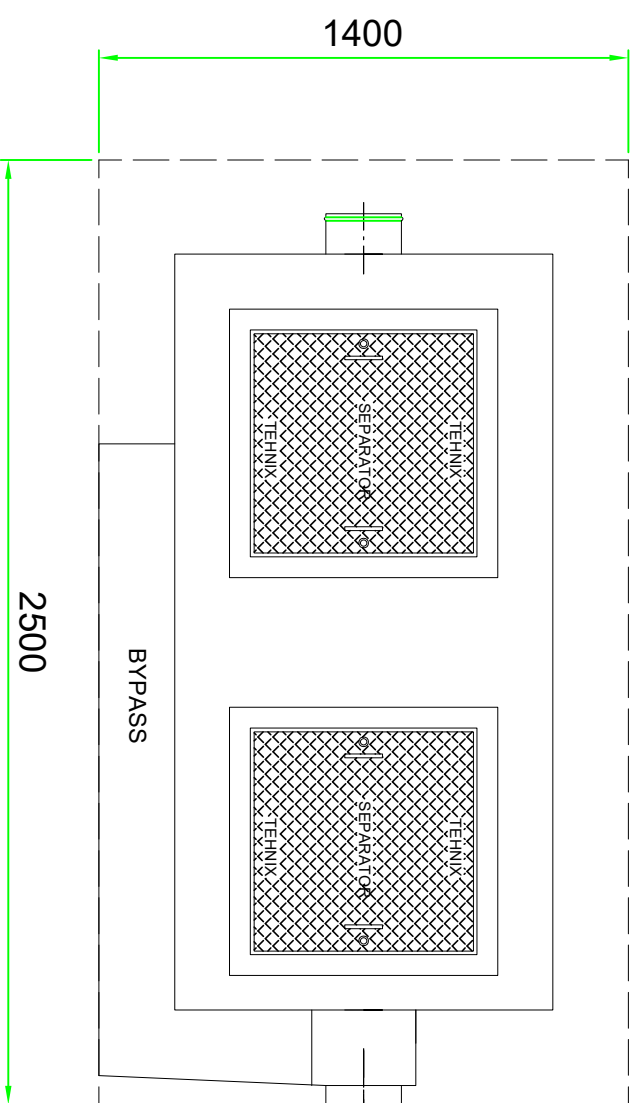[illegible]